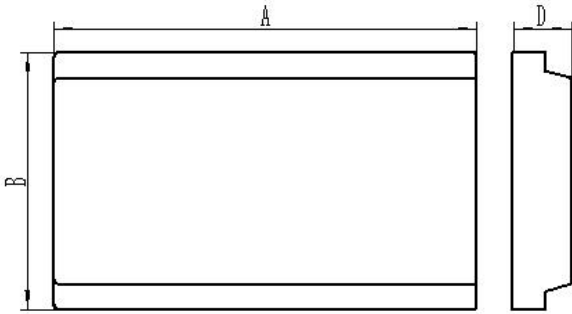


**技术规格 Technical specifications**

1.材质 Material: DTT-P95

2..尺寸和磁芯参数 Size and Core parameters

	尺寸 Size(mm)			
	A	165.00 ± 1.50	D	27.5 ± 1.00
	B	100.00 ± 1.50		
磁芯参数 Core parameters				
有效磁路长度 Effective Length Le				
有效截面积 Effective Cross Area Ae				
有效体积 Effective Volume Ve				
参考重量 Approx. Weight Wt			2020g/pcs.	

3.电气特性 Electrical characteristics

项目 Item	规格 Spec	测试条件 Testing Condition	测试仪器 Testing Instrument
ui	3300 ± 25%	1kHz 0.25V 25℃	Agilent4284A
Pcv	≤380kW/m <sup>3</sup>	100kHz 200mT 100℃	BsT-LMG610

注：以上数据依据相同材料的磁环测试

The above data are based on the magnetic ring test data of the same batch of materials

4.允许最大缺陷（外观）Maximum chip off:

		接合面 Joint face	其他表面 Other surface
破损 broken	1 处破损的面积 1 The damaged area	≤3mm <sup>2</sup>	≤6mm <sup>2</sup>
	2 处以上破损面积的合计 More than two cut area combined	≤6mm <sup>2</sup>	≤12mm <sup>2</sup>
	破损深度 Damage depth	≤2mm	≤3mm
裂纹 cracks	深度 depth	≤0.5mm	≤1mm
	长度 length	≤延长线长度的 1/4 Extension of line length 1/4	≤延长线长度的 1/3 Extension of line length 1/3
其他 other	无有害毛刺，气孔等 No harmful burr, porosity, etc		

Item:	P/N:	SPEC./N
FERRITE CORE	P95F165/100/27.5	P95341651-22304.1